



ALWAYS USE IN CONJUNCTION WITH
 FILTREXX® SLOPE PROTECTION,
 ROLLED EROSION CONTROL
 BLANKET, BONDED FIBER MATTRRESS
 OR SOIL STABILIZERS

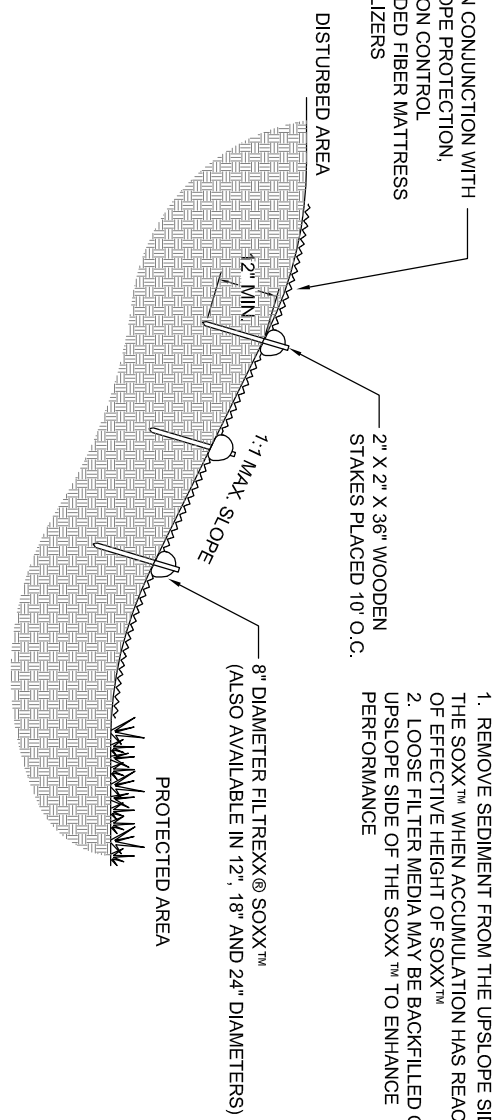

- NOTES:
1. REMOVE SEDIMENT FROM THE UPSLOPE SIDE OF THE SOXX™ WHEN ACCUMULATION HAS REACHED ½ OF EFFECTIVE HEIGHT OF SOXX™
 2. LOOSE FILTER MEDIA MAY BE BACKFILLED ON THE UPSLOPE SIDE OF THE SOXX™ TO ENHANCE PERFORMANCE

ALWAYS USE IN CONJUNCTION WITH
 FILTREXX® SLOPE PROTECTION,
 ROLLED EROSION CONTROL BLANKET,
 BONDED FIBER MATTRRESS OR SOIL
 STABILIZERS

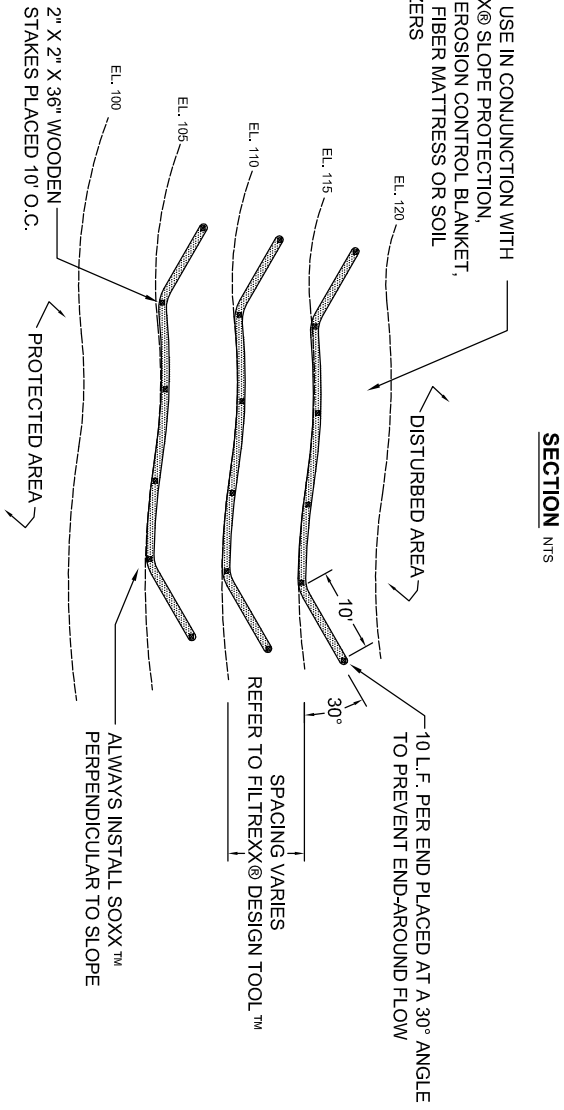

FILTREXX® SLOPE INTERRUPTION

NTS