

**filtr**rexx®  
SUSTAINABLE TECHNOLOGIES




**BioLoxx™**  
NATURAL SPILL ABSORBENT



**ABSORBS OIL, GAS, & MORE**  
**USE 75% LESS THAN CLAY BASED PRODUCTS**

- ▶ 100% NATURAL
- ▶ EASY DISPOSAL
- ▶ LIGHTWEIGHT
- ▶ NONFLAMMABLE



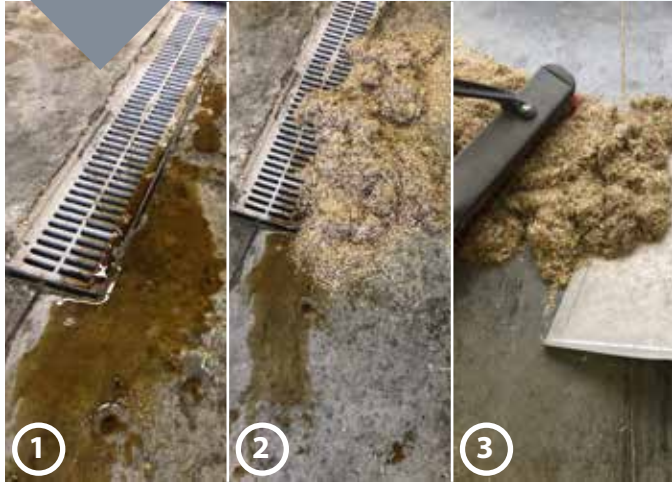

**BioLoxx is a superior absorbent of oils and lubricants generated by spills and equipment leaks.**

BioLoxx is 100% natural, derived from flax straw, and engineered to maximize absorbency. It has been third-party tested to absorb oil, fuels, paint, antifreeze, saltwater released during drilling operations, urine and blood.



**RENEWABLE**



**COST-SAVING**



**LIGHTWEIGHT & EASY TO CLEAN**



**PREVENTS FALLS**



**RESISTS IGNITION**

BioLoxx resists ignition prior to use and does not generate potentially hazardous clay dust. Because BioLoxx is much lighter than clay-based sorbents, the risk of ergonomic injuries is greatly reduced, the product is easier to use, and less product is needed for clean up of spills than a clay based inorganic product (ASTM E1226, Explosion Severity; ASTM E2019, Minimum Ignition Energy [Dust Cloud]; and ASTM E1515, Minimum Explosible Concentration).

To absorb the same amount of oil, up to 75% less BioLoxx by volume is required when compared to clay-based sorbents, costing 75% less per spill than clay (ASTM F726, Sorbent Performance).

Unlike clay-based sorbents, which must be landfilled for disposal, BioLoxx can be incinerated according the end user's local, state, and federal regulations, thereby eliminating potential future liability.

**BioLoxx Specifications**

Item Number	F1706
Product Weight	25 lbs / 11.4 kg
Package Dimensions	21.76 in x 29.75 in x 6 in
Class	Absorbent derived from flax straw
Material	Flax Shives
Absorbent Type	Granules
Absorbent Capacity	25 lb bag will absorb up to 12 gallons of petroleum based oil
Material Features	100% Organic, Non-Abrasive, Non-toxic, Silica Dust-Free
Fluids Absorbed	Oil, gasoline or any petroleum based product, antifreeze, diesel, blood, paint, human/animal fluids and more
Disposal	BioLoxx can be incinerated according the end user's local, state, and federal regulations

# ENVIROSOXX® POLLUTANT FILTER



## Pair **BioLoxx** with **EnviroSoxx Pollutant Filters** for added pollutant protection.

A passive filtration system ready to install on any site, EnviroSoxx targets the most common pollutants in stormwater runoff. EnviroSoxx is available in two different filter blends to target common pollutants. Simply block the flow with a length of EnviroSoxx, then cover and absorb the spill with BioLoxx.

### ENVIROSOXX REMOVAL RATES† (UP TO)

- Total Solids: 98%
- Metals: 73%
- Nutrients: 92%
- Bacteria: 99%
- Hydrocarbons: 99%

### ENVIROSOXX APPLICATIONS

- Inlets & Outfalls
- Ditches & Swales
- Biofiltration
- Perimeters & Wraps

**BioLoxx & EnviroSoxx by Filtrexx are available through distributors nationwide.**

Contact us to find a distributor or inquire about joining our distribution network.



[filtrexx.com](http://filtrexx.com) | 877-542-7699 | [info@filtrexx.com](mailto:info@filtrexx.com)