

filtrrexx[®]
SUSTAINABLE TECHNOLOGIES



BioLoxx[™]

NATURAL SPILL ABSORBENT




ABSORBS OIL, GAS, & MORE
USE 75% LESS THAN CLAY BASED PRODUCTS

▶ 100% NATURAL

▶ EASY DISPOSAL

▶ LIGHTWEIGHT

▶ ECONOMICAL

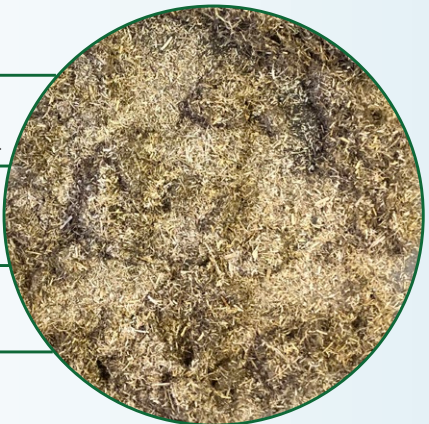



BioLoxx is a superior absorbent of oils and lubricants generated by spills and equipment leaks.

BioLoxx is 100% natural, derived from flax straw, and engineered to maximize absorbency. It has been tested to absorb oils, fuels, and other commonly spilled and leaked fluids.

BioLoxx resists ignition prior to use and does not generate potentially hazardous clay dust. Because BioLoxx is much lighter than clay-based sorbents, the risk of ergonomic injuries is greatly reduced, the product is easier to use, and less product is needed for clean up of spills than a clay based inorganic product (ASTM E1226, Explosion Severity; ASTM E2019, Minimum Ignition Energy [Dust Cloud]; and ASTM E1515, Minimum Explosible Concentration).

To absorb the same amount of oil, 75% less BioLoxx by volume is required when compared to clay-based sorbents, costing 75% less per spill than clay (ASTM F726, Sorbent Performance).

Unlike clay-based sorbents, which must be landfilled for disposal, BioLoxx can be incinerated according the end user's local, state, and federal regulations, thereby eliminating potential future liability.

BioLoxx Instructions



1

STEP 1


For large spills, sprinkle the perimeter of the spill with BioLoxx to prevent the spill from spreading.



2

STEP 2

Cover the rest of the spill with a generous amount of BioLoxx.

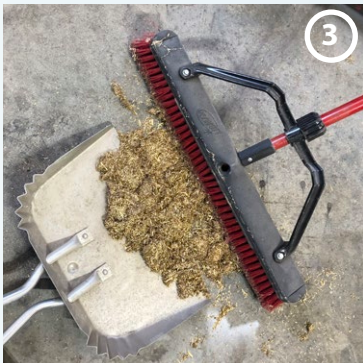

3

STEP 3

With a coarse broom, work the BioLoxx completely, mixing everything together until it has fully absorbed everything and no liquid is visible. Sweep up and dispose.

For added pollutant protection, pair BioLoxx with EnviroSoxx® Pollutant Filters. Simply block the flow with a length of EnviroSoxx, then cover the spill with BioLoxx.

Watch how BioLoxx works at
www.filtrexx.com/bioloxx

BioLoxx Specifications

Item Number	F1706
Product Weight	25 lbs / 11.4 kg
Package Dimensions	21.76 in x 29.75 in x 6 in
Class	Absorbent derived from flax straw
Material	Flax Shives
Absorbent Type	Granules
Absorbent Capacity	25 lb bag will absorb up to 12 gallons of petroleum based oil
Material Features	100% Organic, Non-Abrasive, Non-toxic, Silica Dust-Free
Fluids Absorbed	Oil, gasoline, diesel, and more
Disposal	BioLoxx can be incinerated according the end user's local, state, and federal regulations

**BioLoxx is available
through distributors nationwide.**

Contact us to find a distributor or inquire
about joining our distribution network.



filtrexx.com | 877-542-7699 | info@filtrexx.com